

AngryMailer

一、 Introduction

- a) AngryMailer is a tool for sending email quantity , Simple But Powerful

二、 Main Technology

- a) Edit your email, "What You See Is What You Get"
- b) The mail encode using utf-8, One mail can contain multi-coutry language
- c) Express Mail Service, You don't need regist some mail box.
- d) "Common & EMS send mode", Improve the successful rate of sending mail
- e) Dynamic Variable Technology, Your mail will be personality, It will improve the click rate, It will improve the successful rate of sending mail
- f) Random string technology, The mail size will be different every times, It will improve the successful rate of sending mail
- g) Dynamic Changing Account, It will improve the successful rate of sending mail
- h) The email address of receivers will be sorted Intelligence, It will improve the successful rate of sending mail
- i) Status Display Constantly, You can see the sending status/result/failure reason/sending speed/successful count/failed count/unsent count
- j) The mail will display the same sender and the same repay email address, Although it is sent using different account
- k) Multi-thread sending, you can control the speed of sending mail
- l) Using SQLite database, It will improve the software efficiency
- m) Simple operation, Edit mail->Add account->Add receiver->Send
- n) Green software, un-installation, only one file

三、 Main use


- a) Network Marketing
 - i. Raise your Website's popularity
 - ii. Raise your Product's popularity
- b) Notice to employees
- c) Notice to customers

四、 Platform


- a) Windows XP
- b) Windows Vista
- c) Windows 7

五、 UI

- a) Main Window – Edit Mail

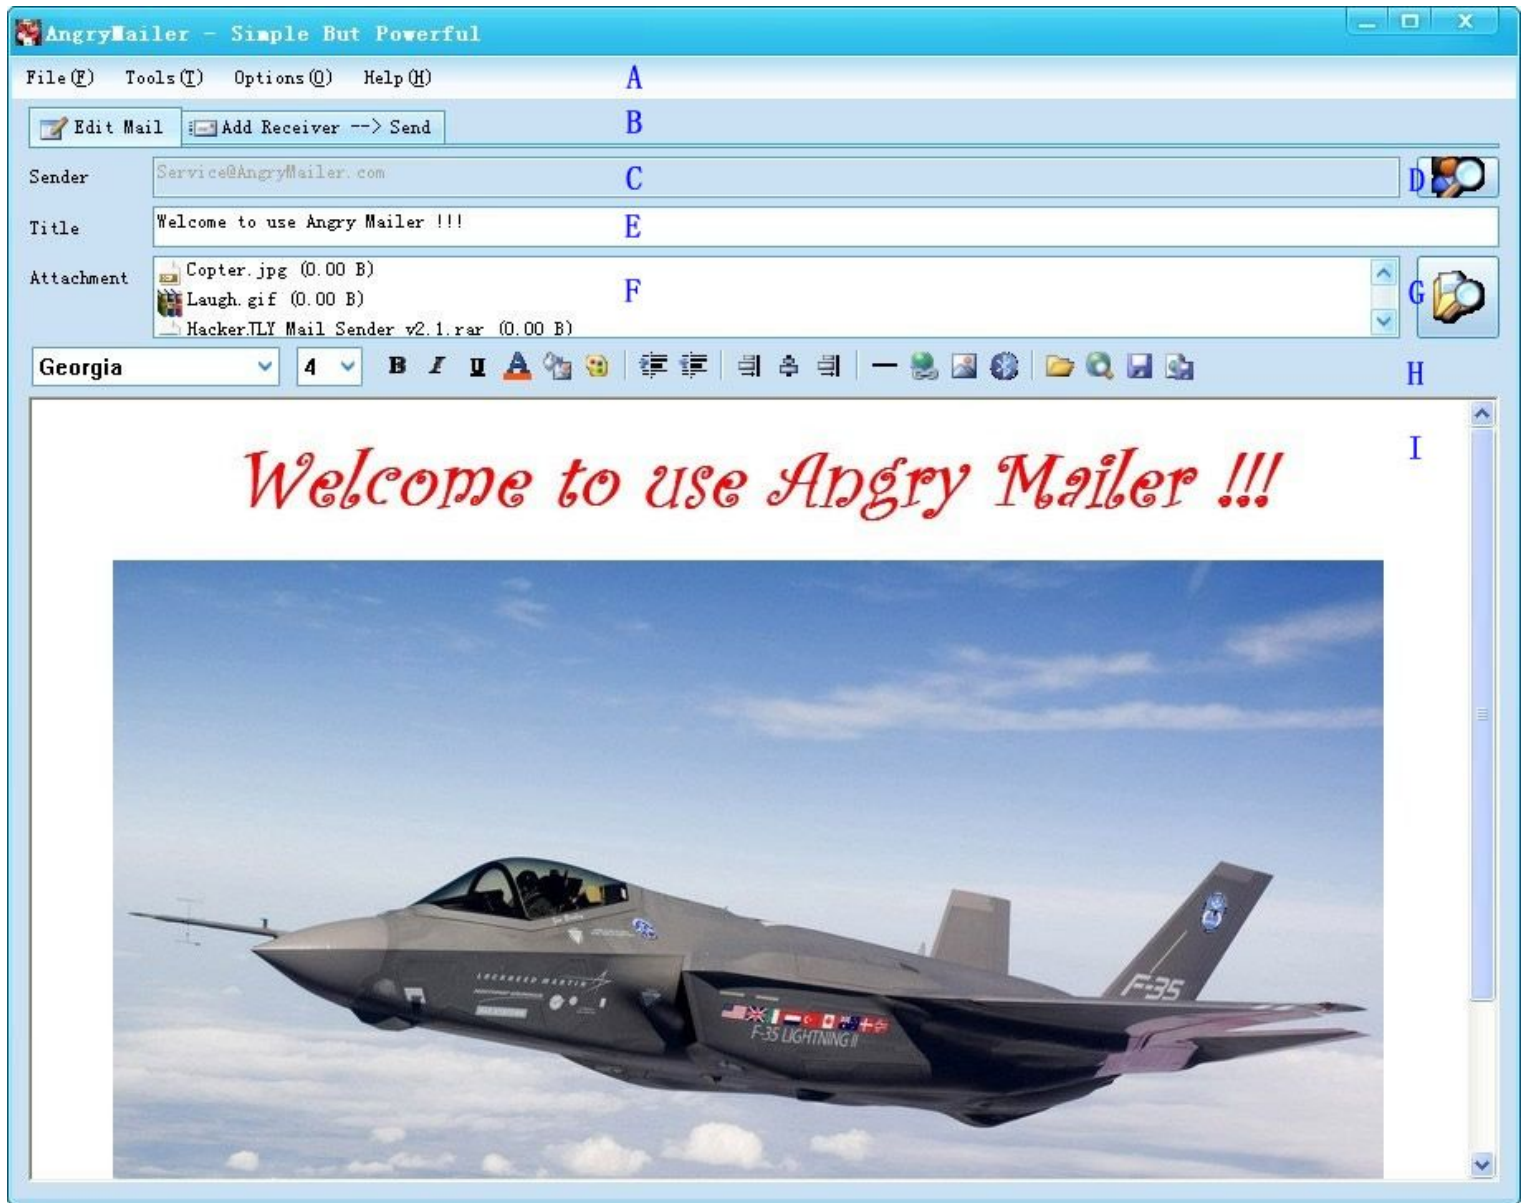


- i. A:Menu
 - ii. B:" Edit Mail" / "Add Receiver → Send" Change Button
 - iii. C:Receivers
 - iv. D:Select the Sender
 - v. E:Mail Title
 - vi. F:Attachment
 - vii. G:Select the attachment
 - viii. H:The toolbar of edit mail
 - ix. I:The area of Edit mail
- b) Main Window – Add Receiver -> Send

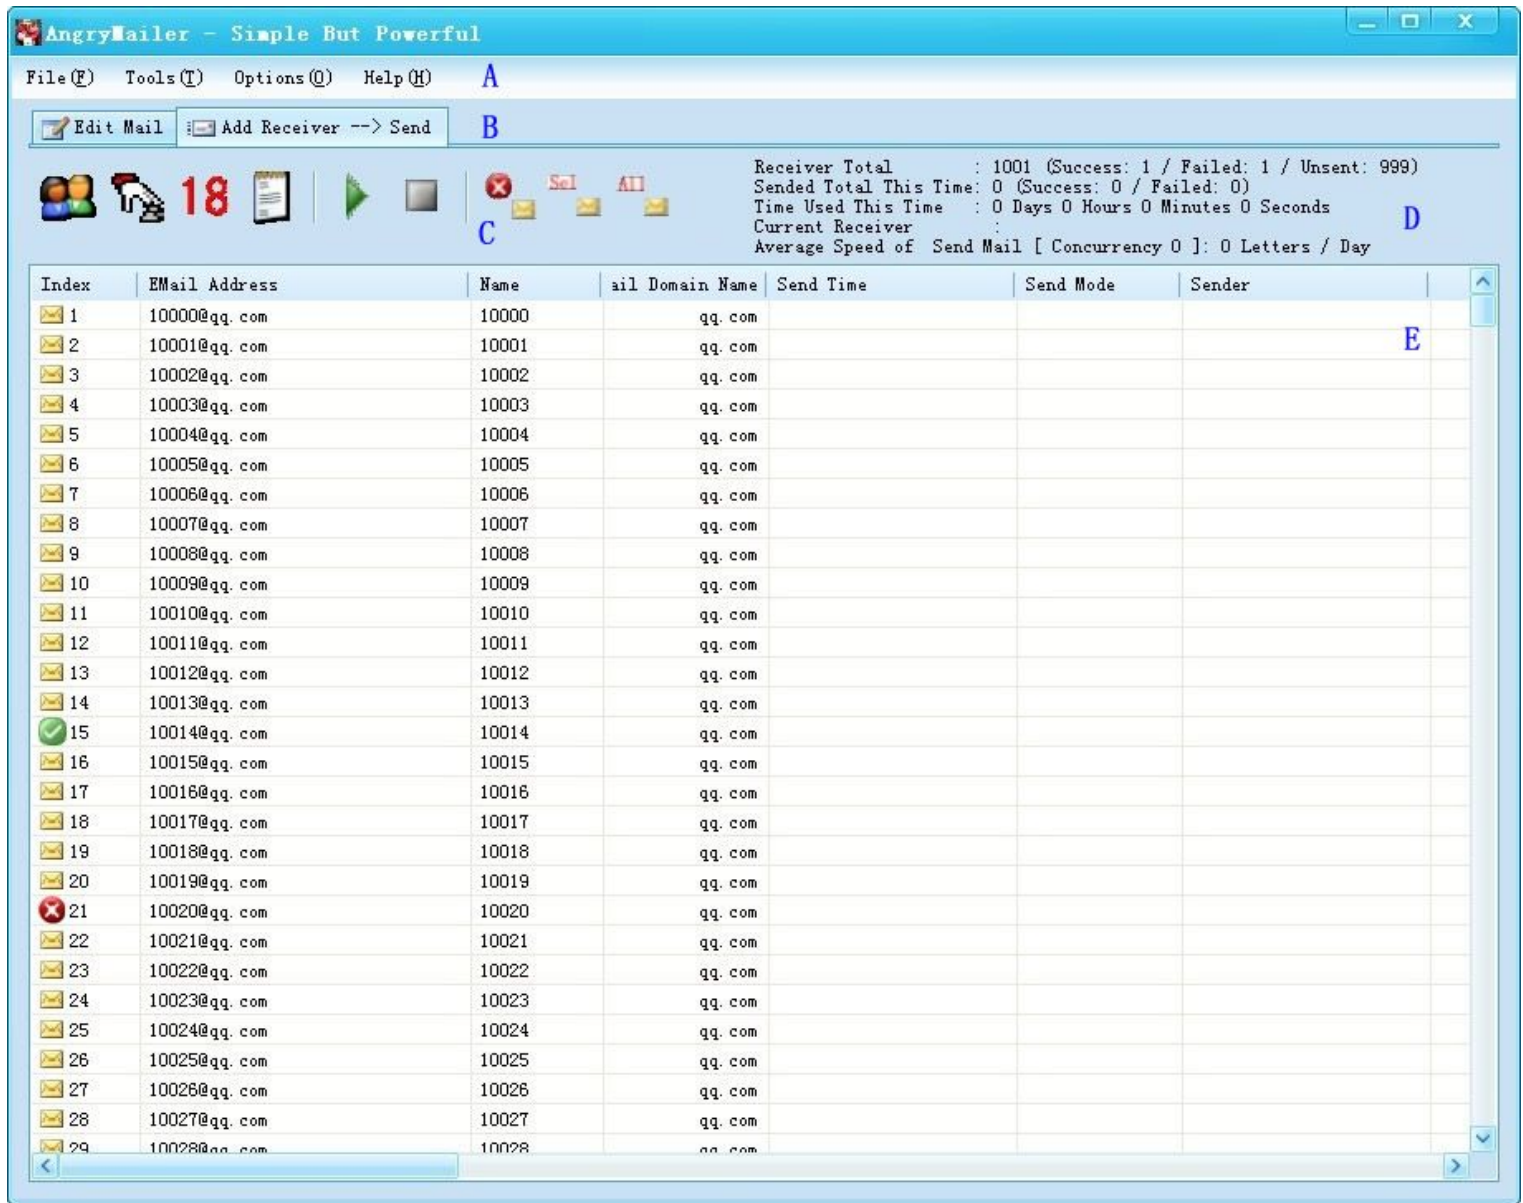


- i. A:Menu
- ii. B:" Edit Mail" / "Add Receiver → Send" Change Button
- iii. C:The operate button of edit receiver
- iv. D:Send status
- v. E:Receiver list
 1. If you want to view or edit the receiver , you can double click the item of the list

c) Menu - File

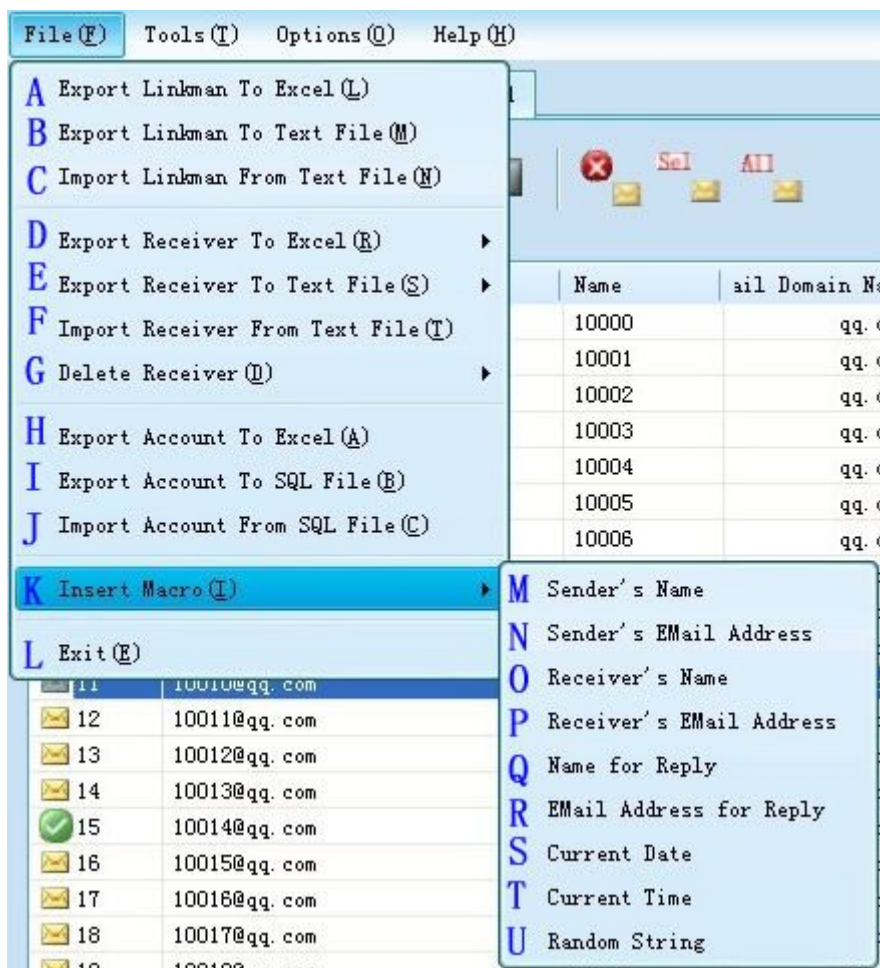

- i. A:Export linkman to excel file
- ii. B:Export linkman to text file
- iii. C:import Linkman from text file
- iv. D: Export receiver to excel file
- v. E: Export receiver to text file
- vi. F: import receiver from text file
- vii. G:Delete Receiver
- viii. H: Export account to excel file
- ix. I: Export account to SQL file
- x. J: import account from SQL file
- xi. K:Insert the macro(You can insert it to mail title/mail content/Account,) ,When the mail is sending, it will be replaced
- xii. L:Exit
- xiii. M:Insert macro: Sender's name
- xiv. N:Insert macro: Sender's Email Address
- xv. O:Insert macro: Receiver's Name
- xvi. P:Insert macro: Receiver's Email Address
- xvii. Q:Insert macro: Name for reply
- xviii. R:Insert macro: Email Address for reply
- xix. S:Insert macro: Current Date
- xx. T:Insert macro: Current Time
- xxi. U:Insert macro: Random String

d) Menu - Tool

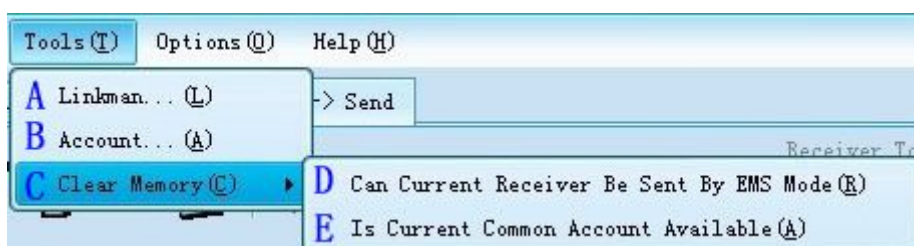

- iii. C:Cancel: Close the dialog
 - iv. D:Add linkman
 - v. E: Modify linkman selected
 - vi. F>Delete the linkman selected
 - vii. G:Export All the linkman to Excel file
- h) Linkman - Add



Add Linkman

Name Service

EMail Service@AngryMailer.com

Add Cancel

- i) Linkman - Modify



Modify Linkman

Name Service

EMail Service@AngryMailer.com

OK Cancel

- j) Receiver - Add

Add Receiver

Name	Service
Email	Service@AngryMailer.com
Status	Unsent
Send Time	
Send Mode	
Sender	
Email Server	
Information	Information

k) Receiver – Add Continuous Number

Add Receiver

StartNum	10000
EndNum	11000
Domain Name	AngryMailer.com
Status	Unsent
Information	

l) Receiver - Modify

Modify Receiver

Name	<input type="text" value="10014"/>
E-Mail	<input type="text" value="10014@qq.com"/>
Status	<input type="text" value="Successful"/>
Send Time	<input type="text"/>
Send Mode	<input type="text"/>
Sender	<input type="text"/>
E-Mail Server	<input type="text"/>
Information	<input type="text"/>

m) Account

- i. A:Send mode
 1. Common Mode: The software will access the server of account(sender)
 2. EMS Mode: The software will access the server of receiver directly
 3. Common Mode Or EMS: All modes can be used
 - ii. B:SMTP Server (IP / Domain name)
 - iii. C:SMTP Server Port (Default 25)
 - iv. D:The Email Address of Account
 - v. E:Username
 - vi. F:Password
 - vii. G: Sender's name show in the mail
 - viii. H: Sender's email address show in the mail
 - ix. I:The email address for reply
 - x. J: The name for reply
 - xi. K:OK
 - xii. L:Cancel
- o) Account - Modify

Modify Account

Send Mode: Common Mode Or EMS

SMTP Server: Mail.AngryMailer.com

The Port of SMTP Server: 25

EMail Address: Service@AngryMailer.com

User Name: Service

Password: *****

Sender Name: Service

Sender's Email Address Show In: Service@AngryMailer.com

Reply EMail Address: Service@AngryMailer.com

Reply Name: Service

OK Cancel

i. The same as "Add account"

p) register

Register

Machine Serial No: be9fbaeaba77ae94b4a9a25ffe4154ca

Register No:

Register Cancel

q) Send Options

Send Options (Take Effect When Send Again)

A Send Interval(Second) To

B Receiver Count Per Time To

C TimeOutOfWaitingForServer(Second):

Account Change

D No Change

E Change Next After Send

F The same domain name account's max failed count when common mode

Send Mode

G Common

H EMS

I Common And EMS

G The same domain name email's max failed count when EMS mode

K The concurrency count of send mail(1 - 20 Recommend):

L The max count of continuous send failed (500 Recommend):

M OK **N** Cancel


- i. A:Send Interval
- ii. B:Receiver Count Per Time(Common Mode Only),There is only one receiver for "EMS" and "Common And EMS" mode every time
- iii. C:Time out of waiting for server, if the server no response , Sending will be failed
- iv. D:Don't change the account
- v. E:Change next account after sending
- vi. F:The same domain name account's max failed count when common mode, if the failed count equal to it, the account will be unavailable
- vii. G:Common mode: The software will access the server of account(sender)
- viii. H:EMS:The software will access the server of receiver directly
- ix. I:Common AND EMS: Include all mode, two mode will be used
- x. J:The same domain name email's max failed count when EMS mode, when the mail is sending, The same domain count of continuous send failed is equal or more than it ,all the receiver of this domain name can be sent using common mode only
- xi. K: The concurrency count of send mail(1 - 20 Recommend),Task number of sending email
- xii. L: The max count of continuous send failed (500 Recommend),when the mail is sending, The count of continuous send failed is equal or more than it ,The software will stop sending
 1. This case will happen when your network is unavailable
- xiii. M:Save setting
- xiv. N:Cancel

r) About




六、 How to use it


a) Input the sender



b) Select the sender



c) Edit the mail

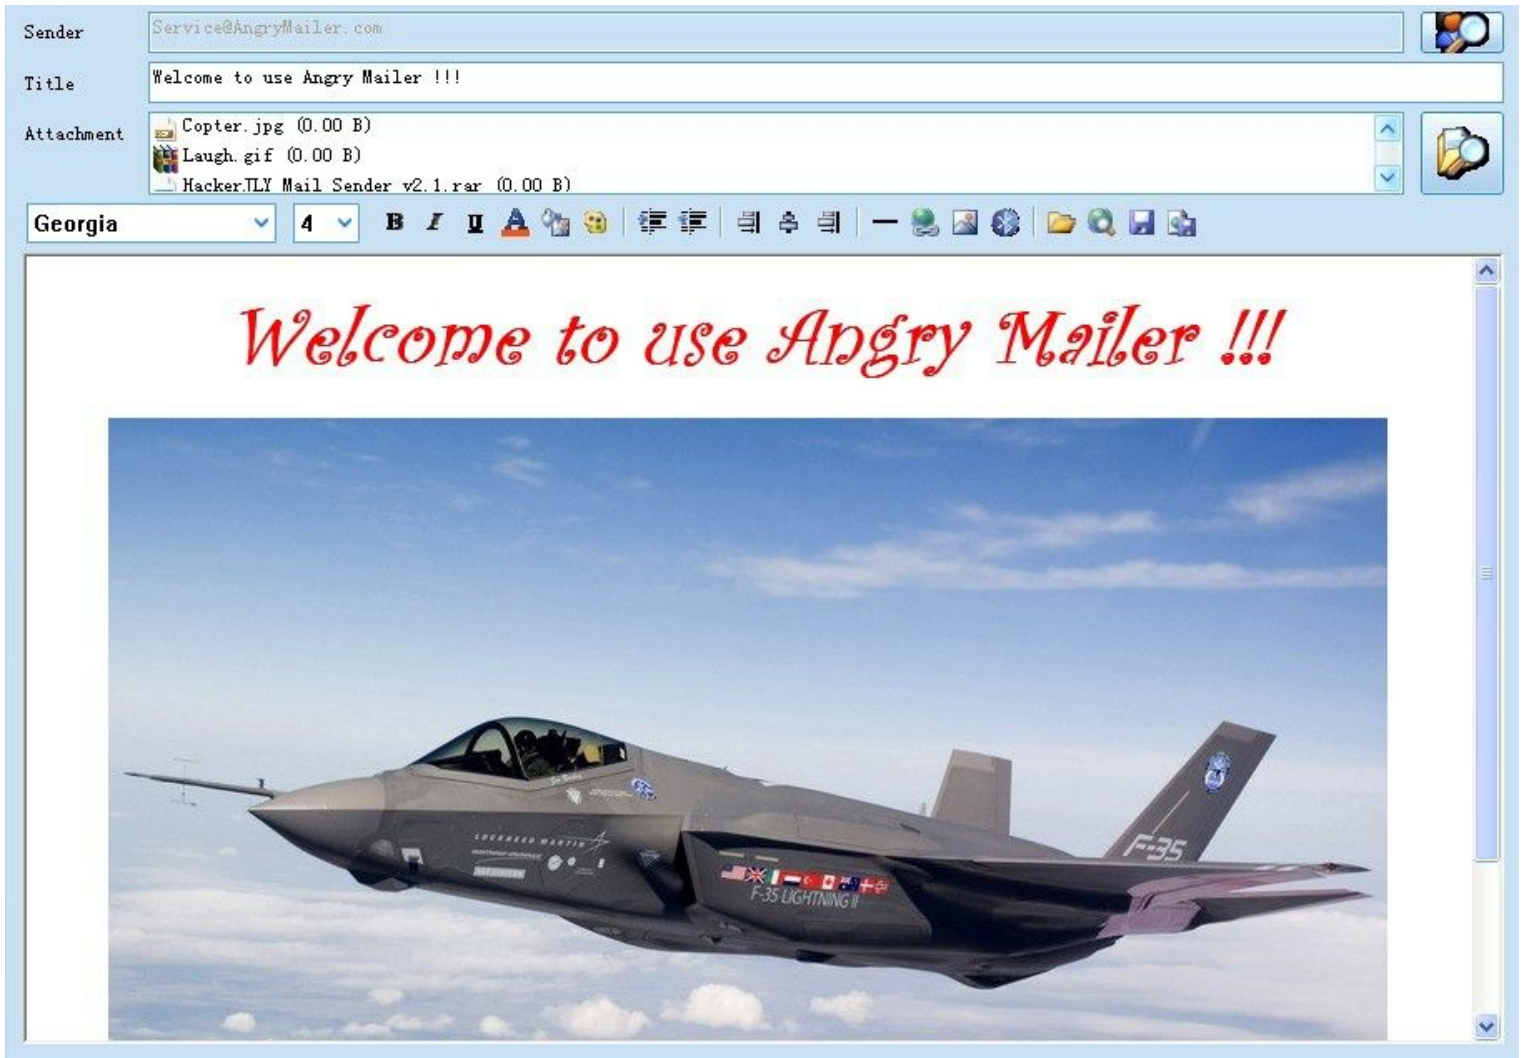

d) Add receivers

Receiver Total : 1001 (Success: 1 / Failed: 1 / Unsent: 999)
 Sended Total This Time: 0 (Success: 0 / Failed: 0)
 Time Used This Time : 0 Days 0 Hours 0 Minutes 0 Seconds
 Current Receiver :
 Average Speed of Send Mail [Concurrency 0]: 0 Letters / Day

Index	E-Mail Address	Name	ail Domain Name	Send Time	Send Mode	Sender
1	10000@qq.com	10000	qq.com			
2	10001@qq.com	10001	qq.com			
3	10002@qq.com	10002	qq.com			
4	10003@qq.com	10003	qq.com			
5	10004@qq.com	10004	qq.com			
6	10005@qq.com	10005	qq.com			
7	10006@qq.com	10006	qq.com			
8	10007@qq.com	10007	qq.com			
9	10008@qq.com	10008	qq.com			
10	10009@qq.com	10009	qq.com			
11	10010@qq.com	10010	qq.com			
12	10011@qq.com	10011	qq.com			
13	10012@qq.com	10012	qq.com			
14	10013@qq.com	10013	qq.com			
15	10014@qq.com	10014	qq.com			
16	10015@qq.com	10015	qq.com			
17	10016@qq.com	10016	qq.com			
18	10017@qq.com	10017	qq.com			
19	10018@qq.com	10018	qq.com			
20	10019@qq.com	10019	qq.com			
21	10020@qq.com	10020	qq.com			
22	10021@qq.com	10021	qq.com			
23	10022@qq.com	10022	qq.com			
24	10023@qq.com	10023	qq.com			
25	10024@qq.com	10024	qq.com			
26	10025@qq.com	10025	qq.com			
27	10026@qq.com	10026	qq.com			
28	10027@qq.com	10027	qq.com			
29	10028@qq.com	10028	qq.com			

e) Send button



七、 Using skills

a) Input Account

i. Common mode Account

1. This account is your mail box of company, or free mail box(qq、foxmail、163、sohu、sina...)

ii. EMS(Express Mail Service) mode Account

1. You can input any account

iii. Common / EMS(Express Mail Service) mode

1. This account is your mail box of company, or free mail box(qq、foxmail、163、sohu、sina...), free mail box not recommend

b) Import Receiver

i. Import receiver from Text file

1. Method 1:File Menu->Import receiver from Text file

2. Method 2: Click the button on the toolbar in the 'add receiver -> send' page



ii. Select From Linkman

1. Method 1:Tool Menu->Linkman, select multi-receivers, then click OK

2. Method 2: Click the button on the toolbar in the 'add receiver -> send' page, select multi-receivers, then click OK



1. Click the button on the toolbar in the 'add receiver -> send' page, select multi-receivers, then click OK

c) Account's text format

i. format

1. Send Mode(0:Common.1:EMS.2:Common & EMS)[||||]SMTP Server[||||]SMTP Server Port[||||]Connect Security Type(0:No Security.2:SSL)[||||]EMail Address[||||]User Name[||||]Password[||||]Sender's Name[||||]Sender's EMail Address display in email[||||]EMail Address for Replay[||||]Name for Replay

ii. Sample

1. Common mode account
 - a) 0[||||]smtp.qq.com[||||]465[||||]2[||||]angrymailer@qq.com[||||]angrymailer[||||]123456[||||]Jackie[||||]Jackie@AngryMailer.com[||||]Jackie@163.com[||||]Jackie
2. EMS account
 - a) 1[||||]mail.angrymailer.com[||||]25[||||]0[||||]Service@angrymailer.com[||||]Service[||||]123456[||||]Jackie[||||]Jackie@AngryMailer.com[||||]Jackie@163.com[||||]Jackie
3. Common & EMS account
 - a) 2[||||]mail.angrymailer.com[||||]25[||||]0[||||]Service@angrymailer.com[||||]Service[||||]123456[||||]Jackie[||||]Jackie@AngryMailer.com[||||]Jackie@163.com[||||]Jackie

iii. Attention

1. It can be ignored after Password, for example:
 - a) 0[||||]smtp.qq.com[||||]465[||||]2[||||]angrymailer@qq.com[||||]angrymailer[||||]123456
2. A account information every line

d) Account's text format (Simple)

i. Format

1. EMail Address[||||]Password

ii. Extend Format

1. EMail Address[||||]Password[||||]Name[||||]Sender's EMail Address display in email[||||]EMail Address for Replay[||||]Name for Replay

iii. Sample

1. AngryMailer@qq.com[||||]123456
2. AngryMailer@qq.com[||||]Jacky[||||]Service@AngryMailer.com[||||]Sales@AngryMailer.com[||||]Jack

iv. Attention

1. It can be ignored after Password
2. Before you import the account simple text, pls ensure the domain name of this account already in the sender's setting

e) Receiver/Linkman's text format

i. Email Address[||||]Name

1. for example:
 - a) AngryMailer@qq.com[||||]AngryMailer
 - b) AngryMailer@sina.com[||||]AngryMailer

ii. "[||||]Name" can be ignored

1. for example:
 - a) AngryMailer@qq.com
 - b) AngryMailer@sina.com

f) Sender Setting's text format

i. Format

1. EMail's domain name[||||]SMTP Server[||||]SMTP Server Port[||||]Connect Security Type(0:No Security.2:SSL)[||||]Send Mode(0:Common.1:EMS.2:Common & EMS)[||||]User Name Type(0:The part front @ Flag of Email address.1:Whole email address)[||||]Name[||||]Prompt Type(0:No Prompt.1:Prompt Open SMTP.)([||||]Prompt String

- ii. Sample
 - 1. Tencent mailbox
 - 2. qq.com[| | | |]smtp.qq.com[| | | |]465[| | | |]2[| | | |]0[| | | |]0[| | | |]Tencent mailbox[| | | |]1[| | | |]Need open SMTP
- iii. attention
 - 1. The part after SMTP Server can be ignore.
 - 2. A account setting information every line

八、 Words

- a) EMS: Express Mail Service

九、 FAQ

- a) When I need click "Clear the memory: Can current receiver be sent by EMS mode, if you clicked it, all the receiver will can be sent by EMS mode"
 - i. When the software prompt "No available receiver!"
- b) When I need click "Clear the memory: Is current common account available, if you clicked it, all the account will be available"
 - i. When the software prompt "No available account!"
- c) When I use EMS mode, I can see any unsent receiver, but the software prompt "No available receiver!"
 - i. Because some email address can't be sent by EMS mode, it can be sent by common mode only
- d) Some places support random string
 - i. Mail Title
 - ii. Mail Content
 - iii. Account Parameters
- e) How to enter random string in account form
 - i. Click the text box want to enter random string
 - ii. Right click on the icon in system tray, select insert macro, then click random string
- f) How to select all the account/linkman/receiver
 - i. Click the first line you want to operate, then hold press shift key, then click the last line you want to operate
- g) How to multi-select the account/linkman/receiver
 - i. Hold press Ctrl key, then click the line you want to select
- h) How to delete all the account/linkman/receiver
 - i. Method 1: selct all, then delete
 - ii. Method 2: delete the db file in the program's starup directory(for example: XXX_DB_Account.db/ XXX_DB_Linkman.db/ XXX_DB_Receiver.db)
- i) How to select send mode
 - i. Common mode("Common account"or "Common & EMS account"required)
 - 1. Receiver have the same domain name (for example:qq.com)
 - 2. Receiver is free mail box
 - ii. EMS("EMS account"or "Common & EMS account"required)
 - 1. Receiver is enterprise's mail box
 - iii. Common & EMS("Common account and EMS account " or "Common & EMS account" required)
- j) Receiver unlimit

十、 Contact

- a) Homepage
 - i. <http://www.AngryMailer.com>
- b) Email
 - i. Service@AngryMailer.com